



Bausatz 2 ele Yagi 28 / 27 MHz (CB) mit 2m Boom im 50 Ohm Design
Antenna kit 2 ele Yagi 28 / 27 MHz (CB) with 2m boom in 50 Ohm Design

Antennenabmessungen je Antennenhälfte					
Dimensions table for each antenna half					
	Alle typen / All types		28 MHz	CB 40 K	CB 80K
	Position (mm)	16 x 1,5mm	12 x 1mm	12 x 1mm	12 x 1mm
Reflektor / Reflector	0	1000	1675	1790	1832
Strahler / Radiator	1900	1000	1483	1575	1609
Gewinn / Gain			4,1 dBd	4,0 dBd	3,9 dBd
V/R Verhältnis / F/B ratio			10,3 dB	10,6 dB	10,7 dB
			@ 28,3 MHz	@ 27,3 MHz	@ 27,0 MHz


CB 40K (26,9-27,9 MHz)

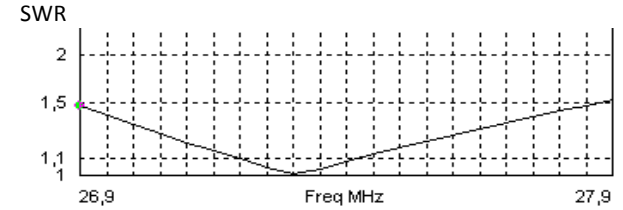


Azimuth

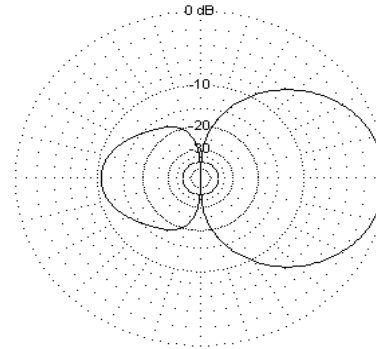


Elevation

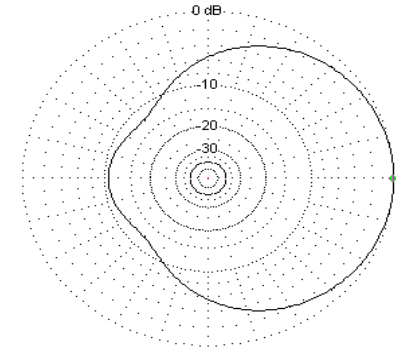


28 MHz Amateur Radio

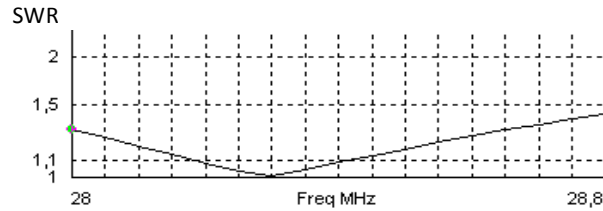


Azimuth

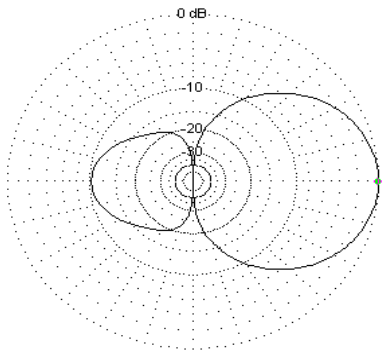


Elevation

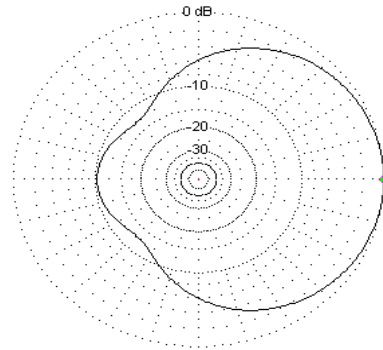

CB 80K (26,5-27,5 MHz)

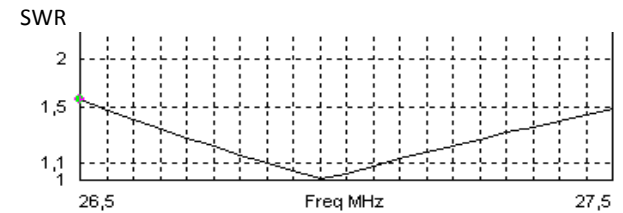

Azimuth

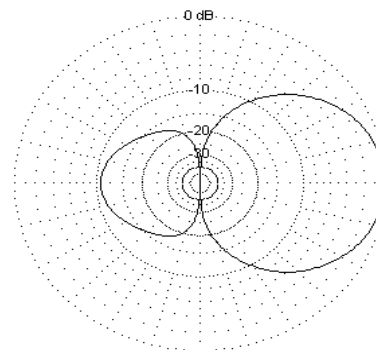

Elevation

